


Thermal Overload Relays

Range: Motor Control Gear

Order Code: DETH-15

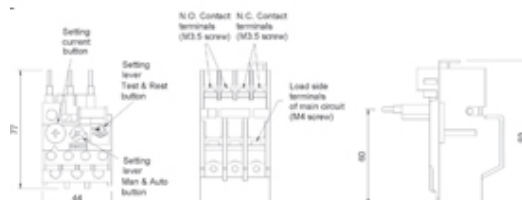

DESCRIPTION

Thermal Overload Relay - Setting Range (A) 10-15

MOTOR CONTROL GEAR FEATURES

- Screw terminals IP20 finger protected.
- C/W Lockable & Sealable MAN/AUTO Switch.
- Combi Head Ready open terminals ready to tighten screws.
- 1 minute self reset when tripped.
- Lightweight and simple to use.

Subject to technical modification without notice.

Typographical and other errors do not justify claim for damages.

SPECIFICATION

| | |
|-----------------------------------|-----------|
| Weight | 0.14 |
| Length (mm) | 93 |
| Width (mm) | 44 |
| Height (mm) | 77 |
| Aux Contact Number | 2 |
| Aux Contact Type | N/O + N/C |
| Body Material | Bakelite |
| Contact Type | DEC-12D |
| Rated insulation voltage (Ui) VAC | 600 |
| Rated thermal current (Ith) A | 6 |
| Relay Setting Range | 10-15 |
| Series | DETH |

INDUSTRY ACCREDITATIONS

