




# Standard PCB Terminal Blocks

Range: PCB Terminal Blocks, Connectors and Fuse Holders

Part Number: AST0721006

---

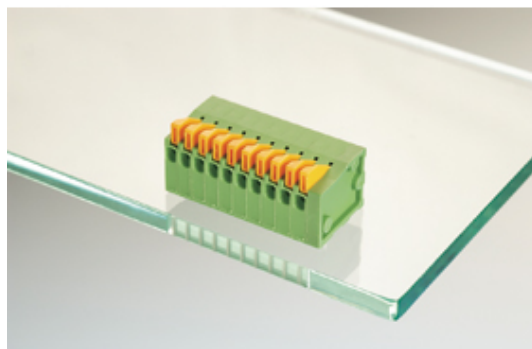

---

## DESCRIPTION

10 Pole horizontal spring PCB terminal block 2.54mm pitch 6A 125V

*Subject to technical modification without notice.*

*Typographical and other errors do not justify claim for damages.*

## SPECIFICATION

|                                    |   |
|------------------------------------|---|
| <b>Type</b>                        | Spring - Screwless  |
| <b>Connection Method</b>           | Pushbutton  |
| <b>Mounting Type</b>               | Wave - through hole   |
| <b>Orientation</b>                 | Horizontal  |
| <b>Join</b>                        | End stackable   |
| <b>Pitch (mm)</b>                  | 2.54  |
| <b>Number of Poles</b>             | 10  |
| <b>Min Wire Size (Sq mm)</b>       | 0.13  |
| <b>Max Wire Size (Sq mm)</b>       | 0.5   |
| <b>Max Current (A)</b>             | 6   |
| <b>Max Voltage (V)</b>             | 125   |
| <b>Height (mm)</b>                 | 12.8  |
| <b>Standard Colour</b>             | Green   |
| <b>Width (mm)</b>                  | 13.6  |
| <b>Length (mm)</b>                 | 27.6  |
| <b>Solder Pin Length (mm)</b>      | 3.2   |
| <b>PCB Hole Diameter (mm)</b>      | 1.1   |
| <b>Comments</b>                    | Pole sizes / no of ways not shown, please contact us for availability |
| <b>IP Rating</b>                   | 20  |
| <b>Min Temperature Rating °C</b>   | 20  |
| <b>Min Wire Size AWG</b>           | 26  |
| <b>Pin Style</b>                   | Solderable  |
| <b>Tracking Resistance CTI (v)</b> | 600   |

## INDUSTRY ACCREDITATIONS

