


Pluggable Pin Header (Male) -Single Row PCB Header

Range: PCB Terminal Blocks, Connectors and Fuse Holders

Order Code: TLPHDC-300V-18P

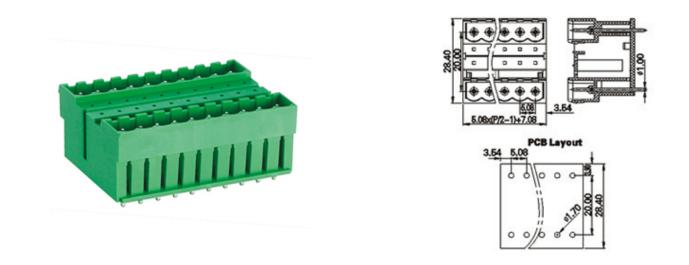

DESCRIPTION

18 Pole PCB mount - Male header Wave - through hole Vertical 5.08mm pitch 12A 300V

Subject to technical modification without notice. Typographical and other errors do not justify claim for damages.



MAKING THE RIGHT CONNECTIONS

SPECIFICATION

Туре	PCB mount - Male header
Mounting Type	Wave - through hole
Orientation	Vertical
Join	Solid body non stackable
Number of Levels	2
Pitch (mm)	5.08
Number of Poles	18
Max Current (A)	12
Max Voltage (V)	300
Height (mm)	22
Standard Colour	Green
Width (mm)	28.4
Length (mm)	48.44
Solder Pin Length (mm)	3.6
PCB Hole Diameter (mm)	1.6-1.7
Approvals Pending	UL Pending
Body Material	PA66 V0
Commonts	Pole sizes / no of ways not shown, please contact us for availability
Comments Min Temperature Rating °C	-40
Max Temperature Rating °C	105

INDUSTRY ACCREDITATIONS



MAKING THE **RIGHT** CONNECTIONS **WWW.HYLEC-APL.COM | SALES@HYLEC-APL.COM | 01933 234400**

