




# Pluggable Pin Header (Male) - Single Row PCB Header

Range: PCB Terminal Blocks, Connectors and Fuse Holders

Order Code: TLPHC-300R-03P5

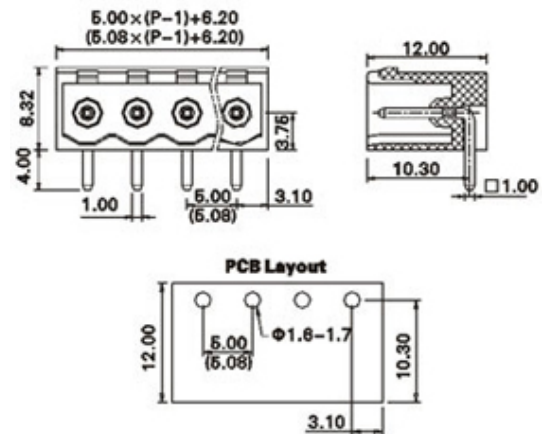

## DESCRIPTION

3 Pole PCB mount - Male header Wave - through hole Horizontal 10.16mm pitch 16A(UL)/15A(VDE) 300V(UL) 250V(VDE)

*Subject to technical modification without notice.*

*Typographical and other errors do not justify claim for damages.*

## SPECIFICATION

|                           |   |
|---------------------------|---|
| Type                      | PCB mount - Male header   |
| Mounting Type             | Wave - through hole   |
| Orientation               | Horizontal  |
| Join                      | Solid body non stackable  |
| Pitch (mm)                | 10.16   |
| Open/Closed/Screw/Flange  | Closed End  |
| Number of Poles           | 3   |
| Max Current (A)           | 16A(UL)/15A(VDE)  |
| Max Voltage (V)           | 300V(UL) 250V(VDE)  |
| Height (mm)               | 8.32  |
| Standard Colour           | Green   |
| Width (mm)                | 12  |
| Length (mm)               | 26.62   |
| Solder Pin Length (mm)    | 4   |
| PCB Hole Diameter (mm)    | 1.6-1.7   |
| Body Material             | PA66 V0   |
| Comments                  | Pole sizes / no of ways not shown, please contact us for availability |
| Min Temperature Rating °C | -40   |
| Max Temperature Rating °C | 105   |

## INDUSTRY ACCREDITATIONS

