


# Contactors

## Range: Motor Control Gear

Order Code: DEC-80D11/110VAC

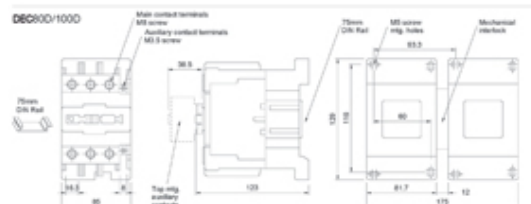

### DESCRIPTION

3 pole contactor, AC1 125A, 110V AC coil

### MOTOR CONTROL GEAR FEATURES

- CSA, CE, UL(listed)
- C/W instantaneous auxiliary contact
- Temperature range of -20°C to +85°C
- Combi Head Ready to Tighten Screws
- Compact design
- Heavy duty pure silver point contact
- IP20 finger protected screws

*Subject to technical modification without notice.*

*Typographical and other errors do not justify claim for damages.*

## SPECIFICATION

Weight	1.43
Length (mm)	129
Width (mm)	81.7
Height (mm)	123
AC1 duty Ø less than/equal 40°C	125
Three Phase Load at 240V (kW)	25
Three Phase Load at 380V (kW)	45
Three Phase Load at 400V (kW)	45
Three Phase Load at 440V (kW)	45
Three Phase Load at 575V (kW)	45
Aux Contact Number	2
Aux Contact Type	N/O + N/C
Series	DEC
Voltage (VAC)	110