


Range: Motor Control Gear

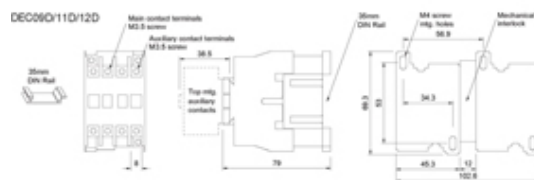

3 pole contactor, AC1 25A,240V AC coil

- CSA, CE, UL(listed)
- C/W instantaneous auxiliary contact
- Temperature range of -20°C to +85°C
- Combi Head Ready to Tighten Screws
- Compact design
- Heavy duty pure silver point contact
- IP20 finger protected screws

Typographical and other errors do not justify claim for damages.

SPECIFICATION

| | |
|---------------------------------|------|
| Weight | 0.35 |
| Length (mm) | 69.3 |
| Width (mm) | 45.3 |
| Height (mm) | 79 |
| AC1 duty Ø less than/equal 40°C | 25 |
| Three Phase Load at 240V (kW) | 3 |
| Three Phase Load at 380V (kW) | 5.5 |
| Three Phase Load at 400V (kW) | 5.5 |
| Three Phase Load at 440V (kW) | 5.5 |
| Three Phase Load at 575V (kW) | 5.5 |
| Single Phase Load at 120V (kW) | 0.55 |
| Single Phase Load at 240 V (kW) | 1.5 |
| Aux Contact Number | 1 |
| Aux Contact Type | N/O |
| Series | DEC |
| Voltage (VAC) | 240 |

INDUSTRY ACCREDITATIONS

