


# Contactors

## Range: Motor Control Gear

Order Code: DEC-18D10/415VAC

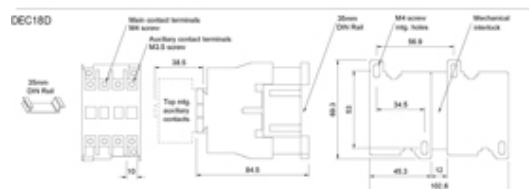

### DESCRIPTION

3 pole contactor, AC1 32A,415V AC coil

### MOTOR CONTROL GEAR FEATURES

- CSA, CE, UL(listed)
- C/W instantaneous auxiliary contact
- Ambient temperature range: Indoor -5°C to +40°C, Outdoor -25°C to +55°C
- Combi Head Ready to Tighten Screws
- Compact design
- Heavy duty pure silver point contact
- IP20 finger protected screws

*Subject to technical modification without notice.*

*Typographical and other errors do not justify claim for damages.*

## SPECIFICATION

Weight	0.38
Length (mm)	69.3
Width (mm)	45.3
Height (mm)	84.5
AC1 duty Ø less than/equal 40°C	32
Three Phase Load at 240V (kW)	5.5
Three Phase Load at 380V (kW)	11
Three Phase Load at 400V (kW)	11
Three Phase Load at 440V (kW)	11
Three Phase Load at 575V (kW)	11
Single Phase Load at 120V (kW)	1.5
Single Phase Load at 240 V (kW)	3.7
Aux Contact Number	1
Aux Contact Type	N/O
Series	DEC
Voltage (VAC)	415

## INDUSTRY ACCREDITATIONS

