


# Thermal Overload Relays

## Range: Motor Control Gear

Order Code: DETH-50

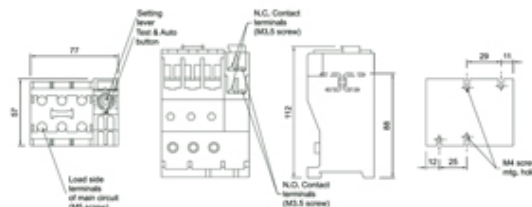

### DESCRIPTION

Thermal Overload Relay - Setting Range (A) 33-50

### MOTOR CONTROL GEAR FEATURES

- Screw terminals IP20 finger protected.
- C/W Lockable & Sealable MAN/AUTO Switch.
- Combi Head Ready open terminals ready to tighten screws.
- 1 minute self reset when tripped.
- Lightweight and simple to use.

*Subject to technical modification without notice.*

*Typographical and other errors do not justify claim for damages.*

## SPECIFICATION

<b>Weight</b>	0.427
<b>Length (mm)</b>	112
<b>Width (mm)</b>	77
<b>Height (mm)</b>	57*
<b>Aux Contact Number</b>	2
<b>Aux Contact Type</b>	N/O + N/C
<b>Body Material</b>	Bakelite
<b>Contact Type</b>	DEC-45D
<b>Rated insulation voltage (Ui) VAC</b>	600
<b>Rated thermal current (Ith) A</b>	6
<b>Relay Setting Range</b>	33-50
<b>Series</b>	DETH

## INDUSTRY ACCREDITATIONS

