


Screw to Pushwire Pillar Blocks

Range: Emech Terminals/Accessories

Order Code: HY232/6 NY

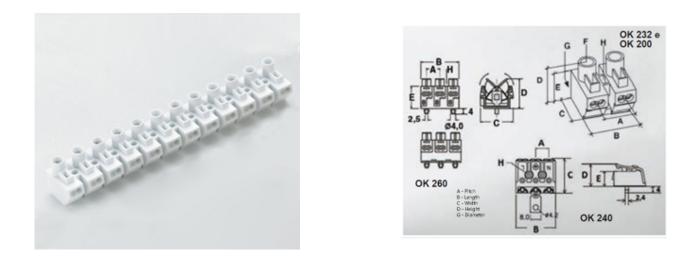

DESCRIPTION

6 pole polyamide PA6.6 screw to pushwire pillar block 10mm pitch 15a 400v

Subject to technical modification without notice. Typographical and other errors do not justify claim for damages.



MAKING THE **RIGHT** CONNECTIONS

SPECIFICATION

Number of Poles	6
Terminal Material	Nickel plated steel
Body Material	Polyamide PA6.6
UL94 Rating	UL94V2
Max Conductor Size (Sq mm)	1.5/2.5
Max Current (A)	15
Max Voltage (V)	400
Working Temperature	110
Pitch (mm)	10
Height (mm)	19
Width (mm)	19
Length (mm)	57
Diameter (mm)	3
Flammability Rating	UL94V2 and GWIT775°C
Terminal Screw Material	White zinc plated steel

INDUSTRY ACCREDITATIONS



MAKING THE **RIGHT** CONNECTIONS **WWW.HYLEC-APL.COM | SALES@HYLEC-APL.COM | 01933 234400**

