


# AC Rotary Isolator Switches

## Range: Rotary Isolator Switches

Order Code: SRI-EAA-20A-GY (DE1S.04.20AC)

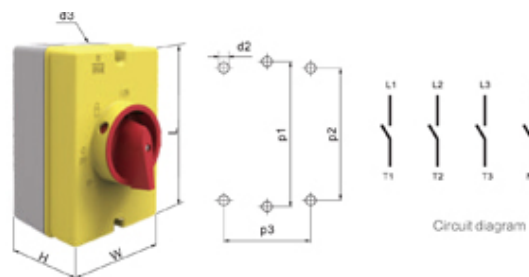

Model	Dimensions			Holes Dimensions				
	d3	W	H	L	p1	p2	p3	d2
20		98	80	145	134	115	81	4.2
25		98	80	145	134	115	81	4.2
32		96	80	145	134	115	81	4.2
40		98	80	145	134	115	81	4.2

### DESCRIPTION

IP66 20A AC Isolator Switch

### ROTARY ISOLATOR SWITCHES FEATURES

- IP66 Rated
- AC & DC Range Available
- Silver Plated Alloy Contacts for High Reliability
- Highly Visible & Robust Housing
- 4-Pole Earth terminal Included
- Polycarbonate UL94V-0 Flame Retardant
- Captive Retained Cover Screws
- Can be Padlocked (padlock not included)

Subject to technical modification without notice.

Typographical and other errors do not justify claim for damages.

## SPECIFICATION

Rated insulation voltage (Ui) VAC	690
Rated Carry Current (A)	20
Rated operating current (A) AC-23A	15
Rated operating current (A) AC-3	11
Rated voltage	240/440
Rated power control (kW) AC-23A	3.7/5.5
Rated power control (kW) AC-3	2.7/3.7
UL-CSA	240/440
Motor Load (HP)	2/3
Rated current within (A)	180