


Screwless - Push Wire

Range: PCB Terminal Blocks, Connectors and Fuse Holders

Part Number: TLM002D-22P

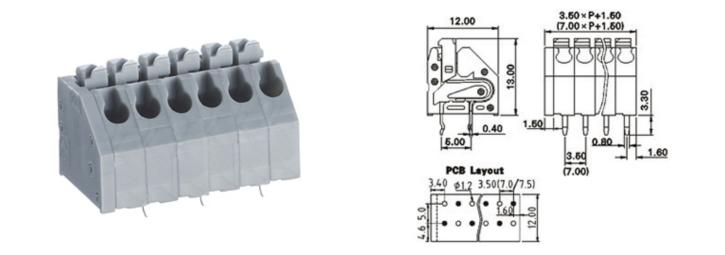

DESCRIPTION

22 Pole Spring - Screwless Pushbutton Wave - through hole Short pin close to side cover 3.5mm pitch 2A 250V

Subject to technical modification without notice. Typographical and other errors do not justify claim for damages.



MAKING THE **RIGHT** CONNECTIONS

SPECIFICATION

| Туре | Spring - Screwless |
|---------------------------------------|---|
| Connection Method | Pushbutton |
| Mounting Type | Wave - through hole |
| Orientation | Short pin close to side cover |
| Join | End stackable |
| Pitch (mm) | 3.5 |
| Number of Poles | 22 |
| Min Wire Size (Sq mm) | 0.33 |
| Max Wire Size (Sq mm) | 1.75 |
| Max Current (A) | 2 |
| Max Voltage (V) | 250 |
| Height (mm) | 13 |
| Standard Colour | Grey |
| Width (mm) | 12 |
| Length (mm) | 78.5 |
| Solder Pin Length (mm) | 3.3 |
| PCB Hole Diameter (mm) | 1.2 |
| Body Material | PA66 V0 |
| Commonte | Pole sizes / no of ways not shown, please contact us for availability |
| Comments Min Temperature Rating °C | -40 |
| Max Temperature Rating °C | 105 |
| Min Wire Size AWG | 22 |
| Max Wire Size AWG | 14 |

INDUSTRY ACCREDITATIONS



