


Screwless - Push Wire

Range: PCB Terminal Blocks, Connectors and Fuse Holders

Part Number: TLM250D-23P

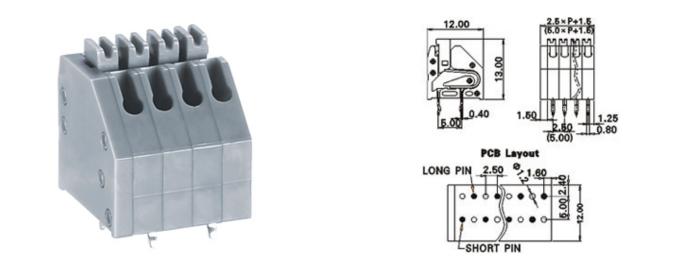

DESCRIPTION

23 Pole Spring - Screwless Pushbutton Wave - through hole Short pin close to side cover 2.5mm pitch 2A 250V

Subject to technical modification without notice. Typographical and other errors do not justify claim for damages.



MAKING THE **RIGHT** CONNECTIONS

SPECIFICATION

Туре	Spring - Screwless
Connection Method	Pushbutton
Mounting Type	Wave - through hole
Orientation	Short pin close to side cover
Join	End stackable
Pitch (mm)	2.5
Number of Poles	23
Max Wire Size (Sq mm)	0.5
Max Current (A)	2
Max Voltage (V)	250
Height (mm)	13
Standard Colour	Grey
Width (mm)	12
Length (mm)	59
Solder Pin Length (mm)	3.3
PCB Hole Diameter (mm)	1.2
Body Material	PA66 V0
Commonte	Pole sizes / no of ways not shown, please contact us for availability
Comments Min Temperature Rating °C	-40
Max Temperature Rating °C	105
Max Wire Size AWG	20

INDUSTRY ACCREDITATIONS



MAKING THE **RIGHT** CONNECTIONS **WWW.HYLEC-APL.COM | SALES@HYLEC-APL.COM | 01933 234400**

