



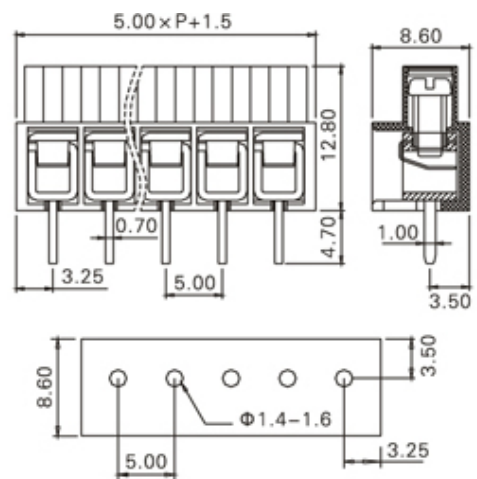

# Through Hole Mount/Wire Protected

Range: PCB Terminal Blocks, Connectors and Fuse Holders

Order Code: TL216K-13PGS

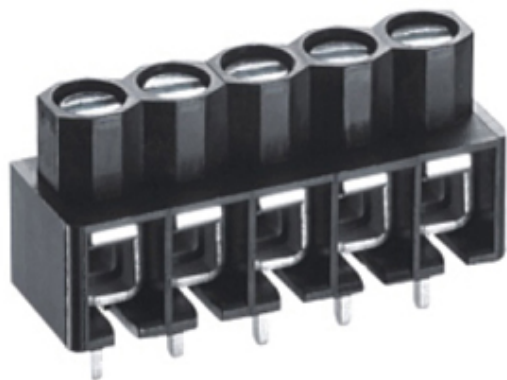

## DESCRIPTION

13 Pole Screw Wire Protector Wave - through hole Vertical 5mm pitch 12A 450V

*Subject to technical modification without notice.*

*Typographical and other errors do not justify claim for damages.*

## SPECIFICATION

Type	Screw
Connection Method	Wire Protector
Mounting Type	Wave - through hole
Orientation	Vertical
Join	Solid body non stackable
Pitch (mm)	5
Number of Poles	13
Min Wire Size (Sq mm)	0.75
Max Wire Size (Sq mm)	4
Max Current (A)	12
Max Voltage (V)	450
Height (mm)	12.8
Standard Colour	Green
Width (mm)	8.6
Length (mm)	66.5
Solder Pin Length (mm)	4.7
PCB Hole Diameter (mm)	1.4-1.6
Body Material	PA66 V0
Comments	Pole sizes / no of ways not shown, please contact us for availability
Min Temperature Rating °C	-40
Max Temperature Rating °C	105
Min Wire Size AWG	18
Max Wire Size AWG	12
Terminal Type	Wire protected

## INDUSTRY ACCREDITATIONS

