



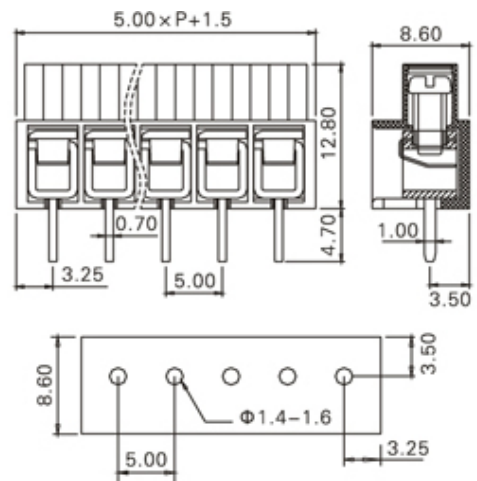

# Through Hole Mount/Wire Protected

Range: PCB Terminal Blocks, Connectors and Fuse Holders

Order Code: TL216K-14PGS

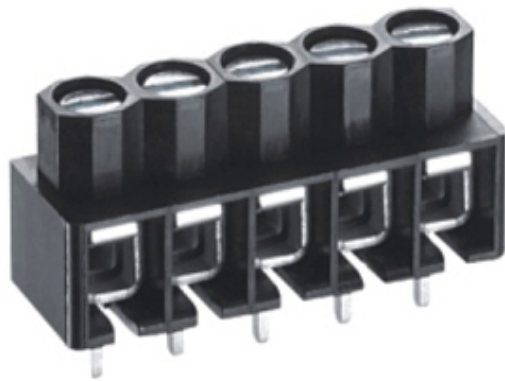

## DESCRIPTION

14 Pole Screw Wire Protector Wave - through hole Vertical 5mm pitch 12A 450V

*Subject to technical modification without notice.*

*Typographical and other errors do not justify claim for damages.*

## SPECIFICATION

|                           |   |
|---------------------------|---|
| Type                      | Screw   |
| Connection Method         | Wire Protector  |
| Mounting Type             | Wave - through hole   |
| Orientation               | Vertical  |
| Join                      | Solid body non stackable  |
| Pitch (mm)                | 5   |
| Number of Poles           | 14  |
| Min Wire Size (Sq mm)     | 0.75  |
| Max Wire Size (Sq mm)     | 4   |
| Max Current (A)           | 12  |
| Max Voltage (V)           | 450   |
| Height (mm)               | 12.8  |
| Standard Colour           | Green   |
| Width (mm)                | 8.6   |
| Length (mm)               | 71.5  |
| Solder Pin Length (mm)    | 4.7   |
| PCB Hole Diameter (mm)    | 1.4-1.6   |
| Body Material             | PA66 V0   |
| Comments                  | Pole sizes / no of ways not shown, please contact us for availability |
| Min Temperature Rating °C | -40   |
| Max Temperature Rating °C | 105   |
| Min Wire Size AWG         | 18  |
| Max Wire Size AWG         | 12  |
| Terminal Type             | Wire protected  |

## INDUSTRY ACCREDITATIONS

