



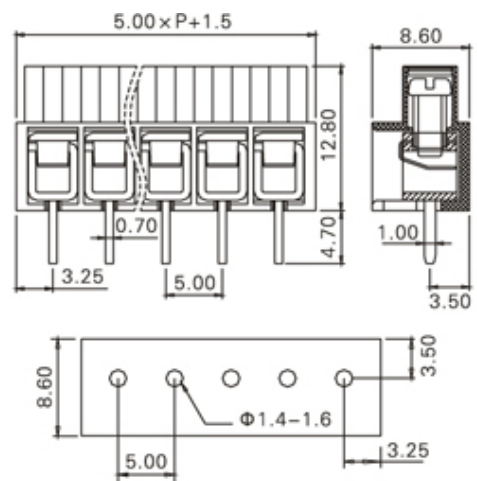

Through Hole Mount/Wire Protected

Range: PCB Terminal Blocks, Connectors and Fuse Holders

Order Code: TL216K-22PGS

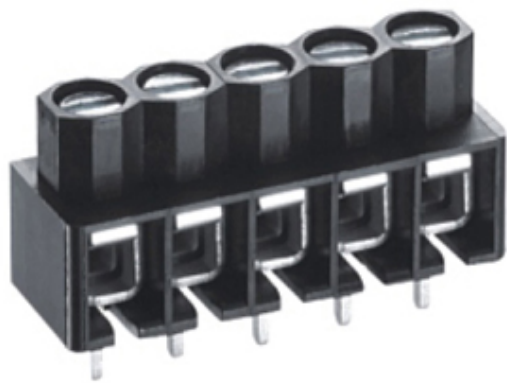

DESCRIPTION

22 Pole Screw Wire Protector Wave - through hole Vertical 5mm pitch 12A 450V

Subject to technical modification without notice.

Typographical and other errors do not justify claim for damages.

SPECIFICATION

Type	Screw
Connection Method	Wire Protector
Mounting Type	Wave - through hole
Orientation	Vertical
Join	Solid body non stackable
Pitch (mm)	5
Number of Poles	22
Min Wire Size (Sq mm)	0.75
Max Wire Size (Sq mm)	4
Max Current (A)	12
Max Voltage (V)	450
Height (mm)	12.8
Standard Colour	Green
Width (mm)	8.6
Length (mm)	111.5
Solder Pin Length (mm)	4.7
PCB Hole Diameter (mm)	1.4-1.6
Body Material	PA66 V0
Comments	Pole sizes / no of ways not shown, please contact us for availability
Min Temperature Rating °C	-40
Max Temperature Rating °C	105
Min Wire Size AWG	18
Max Wire Size AWG	12
Terminal Type	Wire protected

INDUSTRY ACCREDITATIONS

