


Solar Power Connectors

Range: Solar Power Connection

Order Code: CPV-KW5-2T1-Y (CPV-KW5-2T1-Y)

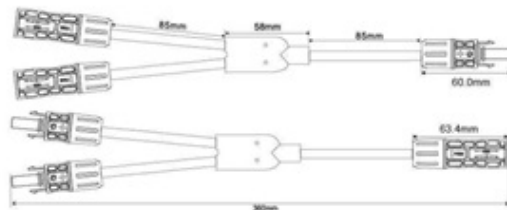

DESCRIPTION

Solar PV Panel Connectors, Pair of 2 to 1 "Y" Branch Connectors, 2 x Male to 1 x Female & 2 x Female to 1 x Male, MC4 compatible, NEC Interlocked, Max current 30A, 1,500V

SOLAR POWER CONNECTION FEATURES

- High Current/Voltage capacity
- NEC Interlocked, tool required to disconnect
- Contact Material - 99.98% pure copper . minimises power loss
- Halogen free XPLO insulation, Virgin PVC sheathing, maximises protection from the elements
- Flame retardant to UV94 V-0
- Highly resistant to high/low temperatures, water, UV light, oxidation, rust, and corrosion

Subject to technical modification without notice.

Typographical and other errors do not justify claim for damages.

SPECIFICATION

| | |
|---------------------------|--|
| Connection Method | MC4, Bayonet locking, 2 to 1 Y Branch Cable Connectors |
| Max Current (A) | 30 |
| Max Voltage (V) | 1500 |
| Colour | Black & Red |
| IP Rating | IP65 |
| Max Temperature Rating °C | 85 |
| Min Temperature Rating °C | -40 |
| UL94 Rating | UL94 V-0 |
| Cable Diameter (mm) | 4 |
| Contacts Material | Tin Plated Copper |
| Cable Entries | 3 |
| Standards | IEC62852:2014 |

INDUSTRY ACCREDITATIONS

