




# Solar Power Extension Cables

## Range: Solar Power Connection

Order Code: CPV-RE5-1T1-B03

---

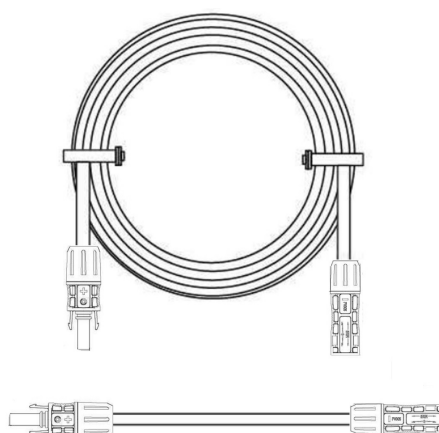

---

### DESCRIPTION

A single, Red MC4 Solar PV extension cable, DC to DC, 6mm diameter, length 3 metres with Male & Female CPV-KC5-1T1-I connectors, rated to 1,500V

### SOLAR POWER CONNECTION FEATURES

- High Currency/Voltage capacity
- NEC Interlocked
- Contact Material - 99.98% pure copper, minimises power loss
- Halogen free XPLO insulation, Virgin PVC sheathing, maximises protection from the elements
- Flame retardant to UV94 V-0
- Highly resistant to high/low temperatures, water, UV light, oxidation, rust, and corrosion

*Subject to technical modification without notice.*

*Typographical and other errors do not justify claim for damages.*

## SPECIFICATION

Connection Method	MC4, Bayonet locking, NEC Interlocked
Max Current (A)	30
Max Voltage (V)	1,500
Colour	Red
IP Rating	IP68
Max Temperature Rating °C	85
Min Temperature Rating °C	-40
UL94 Rating	UL94 V-0
Cable Diameter (mm)	4
Contacts Material	Tin Plated Copper
Length (Metres)	3

## INDUSTRY ACCREDITATIONS

