


Solar Power Connectors

Range: Solar Power Connection

Order Code: CPV-JW5-2T1-Y

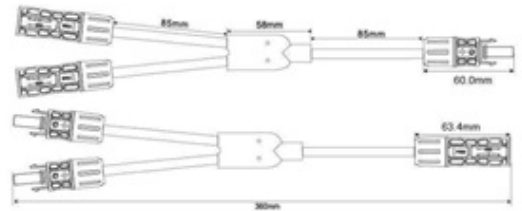

DESCRIPTION

Solar PV Panel Connectors, Pair of Black, 2 to 1 "Y" Branch Connectors, 2 x Male to 1 x Female & 2 x Female to 1 x Male, MC4 compatible, NEC Interlocked, Max current 30A, 1,500V

SOLAR POWER CONNECTION FEATURES

- High Current/Voltage capacity
- NEC Interlocked, tool required to disconnect
- Contact Material - 99.98% pure copper . minimises power loss
- Halogen free XPLO insulation, Virgin PVC sheathing, maximises protection from the elements
- Flame retardant to UV94 V-0
- Highly resistant to high/low temperatures, water, UV light, oxidation, rust, and corrosion

Subject to technical modification without notice.

Typographical and other errors do not justify claim for damages.

SPECIFICATION

Connection Method	MC4, Bayonet locking, 2 to 1 Y Branch Cable Connectors
Max Current (A)	30
Max Voltage (V)	1500
Colour	Black & Red
IP Rating	IP65
Max Temperature Rating °C	85
Min Temperature Rating °C	-40
UL94 Rating	UL94 V-0
Cable Diameter (mm)	4
Contacts Material	Tin Plated Copper
Cable Entries	3
Standards	IEC62852:2014

INDUSTRY ACCREDITATIONS

