

Combiner Boxes and Accessories

Range: Solar Power Connection

Order Code: TCB-WKA-4I1O-1000V



DESCRIPTION

Control and Safety Equipment for Solar Power distribution. 4-In, 1-Out Combiner box, comprising a Pre-connected Combiner Box with surge protection, current isolation and leakage/grounding protection. Additionally supplied with photovoltaic connectors, cable glands and breather plug.

For a larger sized image and a wiring diagram, click datasheet link

SOLAR POWER CONNECTION FEATURES

- _ . .
- Polycarbonate body materialIP65 Protection, IK08 Impact Resistance
- · IF 05 FT0tection, iN00 impact Nesistance
- Storage temperature -25oC to +90oC
- UV protective transparent door
- · Resistant to water, corrosion and dust

Subject to technical modification without notice. Typographical and other errors do not justify claim for damages.

MAKING THE **RIGHT** CONNECTIONS

hylec

SPECIFICATION


Max Current (A)	63
Max Voltage (V)	1000
Colour	Grey
IP Rating	IP65
Max Temperature Rating °C	+90
Min Temperature Rating °C	-25
Cable Entries	4 in-1 out
Body Colour	Grey
Body Material	Polycarbonate

INDUSTRY ACCREDITATIONS





ADDITIONAL INFORMATION

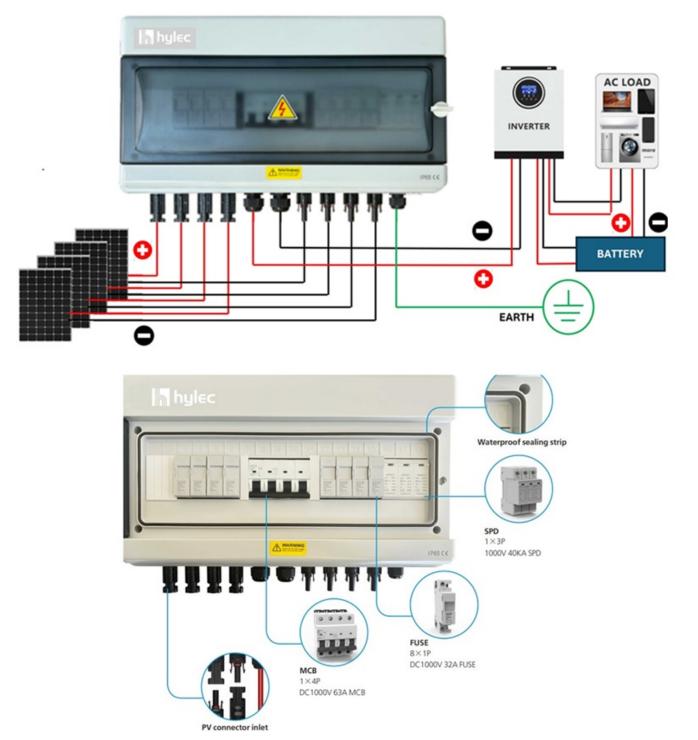

MAKING THE **RIGHT** CONNECTIONS **WWW.HYLEC-APL.COM | SALES@HYLEC-APL.COM | 01933 234400** hylec