




Fuse Holders

Range: PCB Terminal Blocks, Connectors and Fuse Holders

Order Code: CFH-PEA-22.60I-BK (DFH14N)

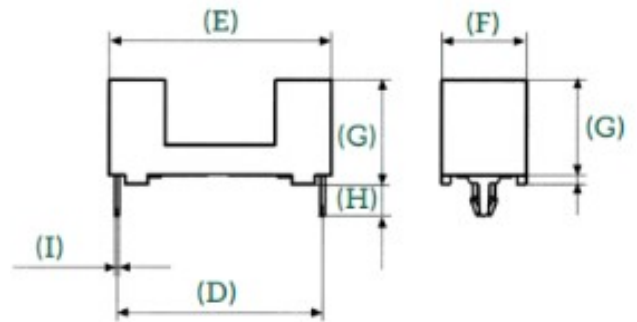

DESCRIPTION

5x20mm Semi Enclosed Fuse Holder 22.6mm Pitch PCB Mount Fuse holder
,suitable for 5x20 fuses. Made from a high quality PA66 that features UL94-V0 flammability resistance, rated up to 20A.

PCB TERMINAL BLOCKS, CONNECTORS AND FUSE HOLDERS FEATURES

- Insulated fuse carrier and retainer with finger proof enclosed contacts.
- PCB mounting with 22.6mm pin pitch
- Molded in flame retardant UL94 V0 Polyamide
- Manufactured in accordance with IEC 127-6
- UL, cURus, VDE Semko and CE/UKCA approved

*Subject to technical modification without notice.
Typographical and other errors do not justify claim for damages.*

SPECIFICATION

Pitch (mm)	22.6
Max Current (A)	6.3A (VDE) 20A (UL)
Max Voltage (V)	250VAC (VDE) 250VAC (UL)
Height (mm)	11.50mm (excluding pins)
Standard Colour	Black
Width (mm)	9.4
Length (mm)	24.4
Fuse pole Rating	6.3A/250V
Contacts Material	Tinned Nickel Plated Brass
Dielectric Strength	3KV/60Å°
Power Dissipation (w)	1.6
PCB Hole Size (Recommended) (mm)	1.5
Insulation Resistance (mOhm)	100
Body Material	UL94 V0 Flame Retardant PA
Contact Resistance (mOhm)	< 5
Fuse Holder Style	Semi Enclosed
Fuse Size (mm)	5x20
Min Temperature Rating °C	-30
Max Temperature Rating °C	+85

INDUSTRY ACCREDITATIONS

