




# Pillar Terminal Blocks

## Range: Emech Terminals/Accessories

Order Code: CTS-IGF-F10-W11 (HY433/11 FVFLP)

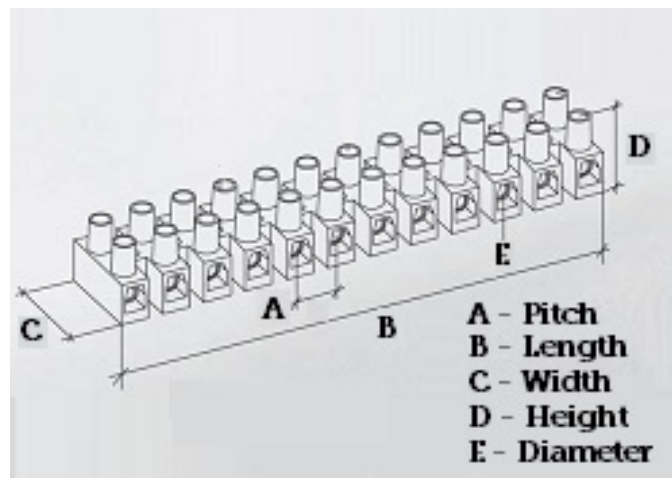

### DESCRIPTION

An 11-pole, high temperature terminal strip, reinforced with 25% Fibreglass, Flat base, wire protected

### EMECH TERMINALS/ACCESSORIES FEATURES

- High Quality Terminal Strip for use in High Temperature applications
- Material: Polyamide PA6.6 with 25% fibreglass reinforcement
- High Temperature Specification: 200°C short term, 150°C working temperature
- Flammability rating: UL94-V0 (Self Extinguishing)
- Glow Wire Tested: GWIT775 & GTW750 - IEC 60335-1 ed.IV (EN60695-2-11 no flame within 2 seconds on piece)
- Certification: VDE, CE, cURus
- Design: Flat base, wire protected

*Subject to technical modification without notice.*

*Typographical and other errors do not justify claim for damages.*

## SPECIFICATION

<b>Number of Poles</b>	11
<b>Terminal Material</b>	OT58 nickel plated
<b>Terminal Type</b>	Wire Protected
<b>Body Material</b>	Polyamide PA6.6, with 25% glass fibre reinforced
<b>Colour</b>	Red-brown
<b>Glow Wire Resistance Test Temp</b>	GWT750°C in 2 sec (EN60695-2-11)
<b>Max Conductor Size (Sq mm)</b>	2.5
<b>Max Current (A)</b>	24
<b>Max Voltage (V)</b>	450
<b>Working Temperature</b>	150
<b>Pitch (mm)</b>	10
<b>Height (mm)</b>	15.7
<b>Width (mm)</b>	20.3
<b>Length (mm)</b>	107.2
<b>Diameter (mm)</b>	3.2
<b>Terminal Screw Material</b>	White zinc plated steel
<b>Wire Protection Material</b>	Stainless steel

## INDUSTRY ACCREDITATIONS

